




Features:

- Intel® 12/13th Gen Core™ i3/i5/i7 -U/P/H CPU
- 2*DDR5 SO-DIMM slot, Max Capacity 64GB
- HDMI、DP、VGA Output,
- WiFi/4G wireless expansion
- Support a variety of APQ expansion
- USB 2.0 Type-A
- Support desktop, wall mounted, and DIN rails
- Fanless passive cooling
- 12~28V DC

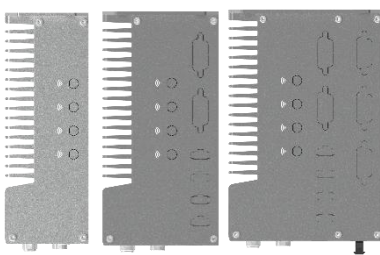

Remote
Management



Condition
Monitoring



Remote
Operation
And
Maintenance




Safety Control

Product Specification


Model		AK62xxA2
CPU	CPU	Intel® 12/13 th Generation Core™ i3/i5/i7 Mobile -U/P/H CPU
	Chip	SOC
BIOS	BIOS	AMI UEFI BIOS
Memory	Socket	2 * DDR5 SO-DIMM Slot, Dual Channel up to 5200MHz
	Max Capacity	64GB, Single Max. 32GB
Graphics	Controller	Intel® Iris® Xe Graphics
Ethernet	Controller	1 * Intel® i210-AT GbE LAN Chip (10/100/1000 Mbps)
		1 * Intel® i219-LM GbE LAN Chip (10/100/1000 Mbps)
Storage	M.2	1 * M.2 Key-M (PCIe x4 Gen 3, NVMe SSD, 2280)
Expansion Slots	Mini PCIe	1 * Mini PCIe (PCIe x1 Gen 2 + USB 2.0, with SIM card slot) 1 * Mini PCIe (USB 2.0, PCIe x1 Gen2 is optional)
	Primary Cabinet	1A/1B/1C/1D/1E/2A/3A
	Secondary Cabinet	1E
Front I/O	USB	6 * USB3.0 (Type-A)
	Serial	2 * RS232/485 (COM1/2, DB9/M, Full lanes)
	Display	1 * HDMI: max resolution up to 4096*2304 @ 24Hz 1 * DP: max resolution up to 4096*2160 @ 60Hz 1 * VGA: max resolution up to 1920*1200 @ 60Hz
	LAN	2 * RJ45
	Power	1 * DC Power Input
	SIM	1 * Nano SIM Card slot (Mini PCIe module provide functional support)
	Button	1 * Power Button + Power LED 1 * PS_ON Connector
Bottom I/O	Switch	1 * AT/ATX Mode Switch (Enable/Disable automatically power on)
	Button	1 * Reset (Hold down 0.2 to 1s to restart, 3s to clear CMOS) 1 * OS Rec (system recovery)
Power Supply	Type	DC
	Power Input Voltage	12 ~ 28VDC Note: When using the light source and POE, 24V input must be used.
	Connector	1 * 4Pin Power Input Connector (P= 5.08mm)
	RTC Battery	CR2032 Battery
OS Support	Windows	Windows 10
	Linux	Linux
Watchdog	Output	System Reset
	Interval	Programmable via Software from 1 to 255 sec
Mechanical	Enclosure Material	Radiator/Box: Aluminum alloy, Top/Bottom Cover: SGCC
	Dimensions	53mm(L) * 145mm(W) * 186.4mm(H)
	Mounting	Wall mounted, DIN, Desktop
Environment	Heat Dissipation System	Passive Heat Dissipation (-U/P CPU)/PWM Air Cooling (-H CPU)
	Operating Temperature	-20~60℃
	Storage Temperature	-40~80℃
	Relative Humidity	5 to 90% RH (non-condensing)
	Vibration During Operation	With SSD: IEC 60068-2-64 (3Grms@5~500Hz, random, 1hr/axis)
	Shock During Operation	With SSD: IEC 60068-2-27 (30G, half sine, 11ms)

Product Size


Box

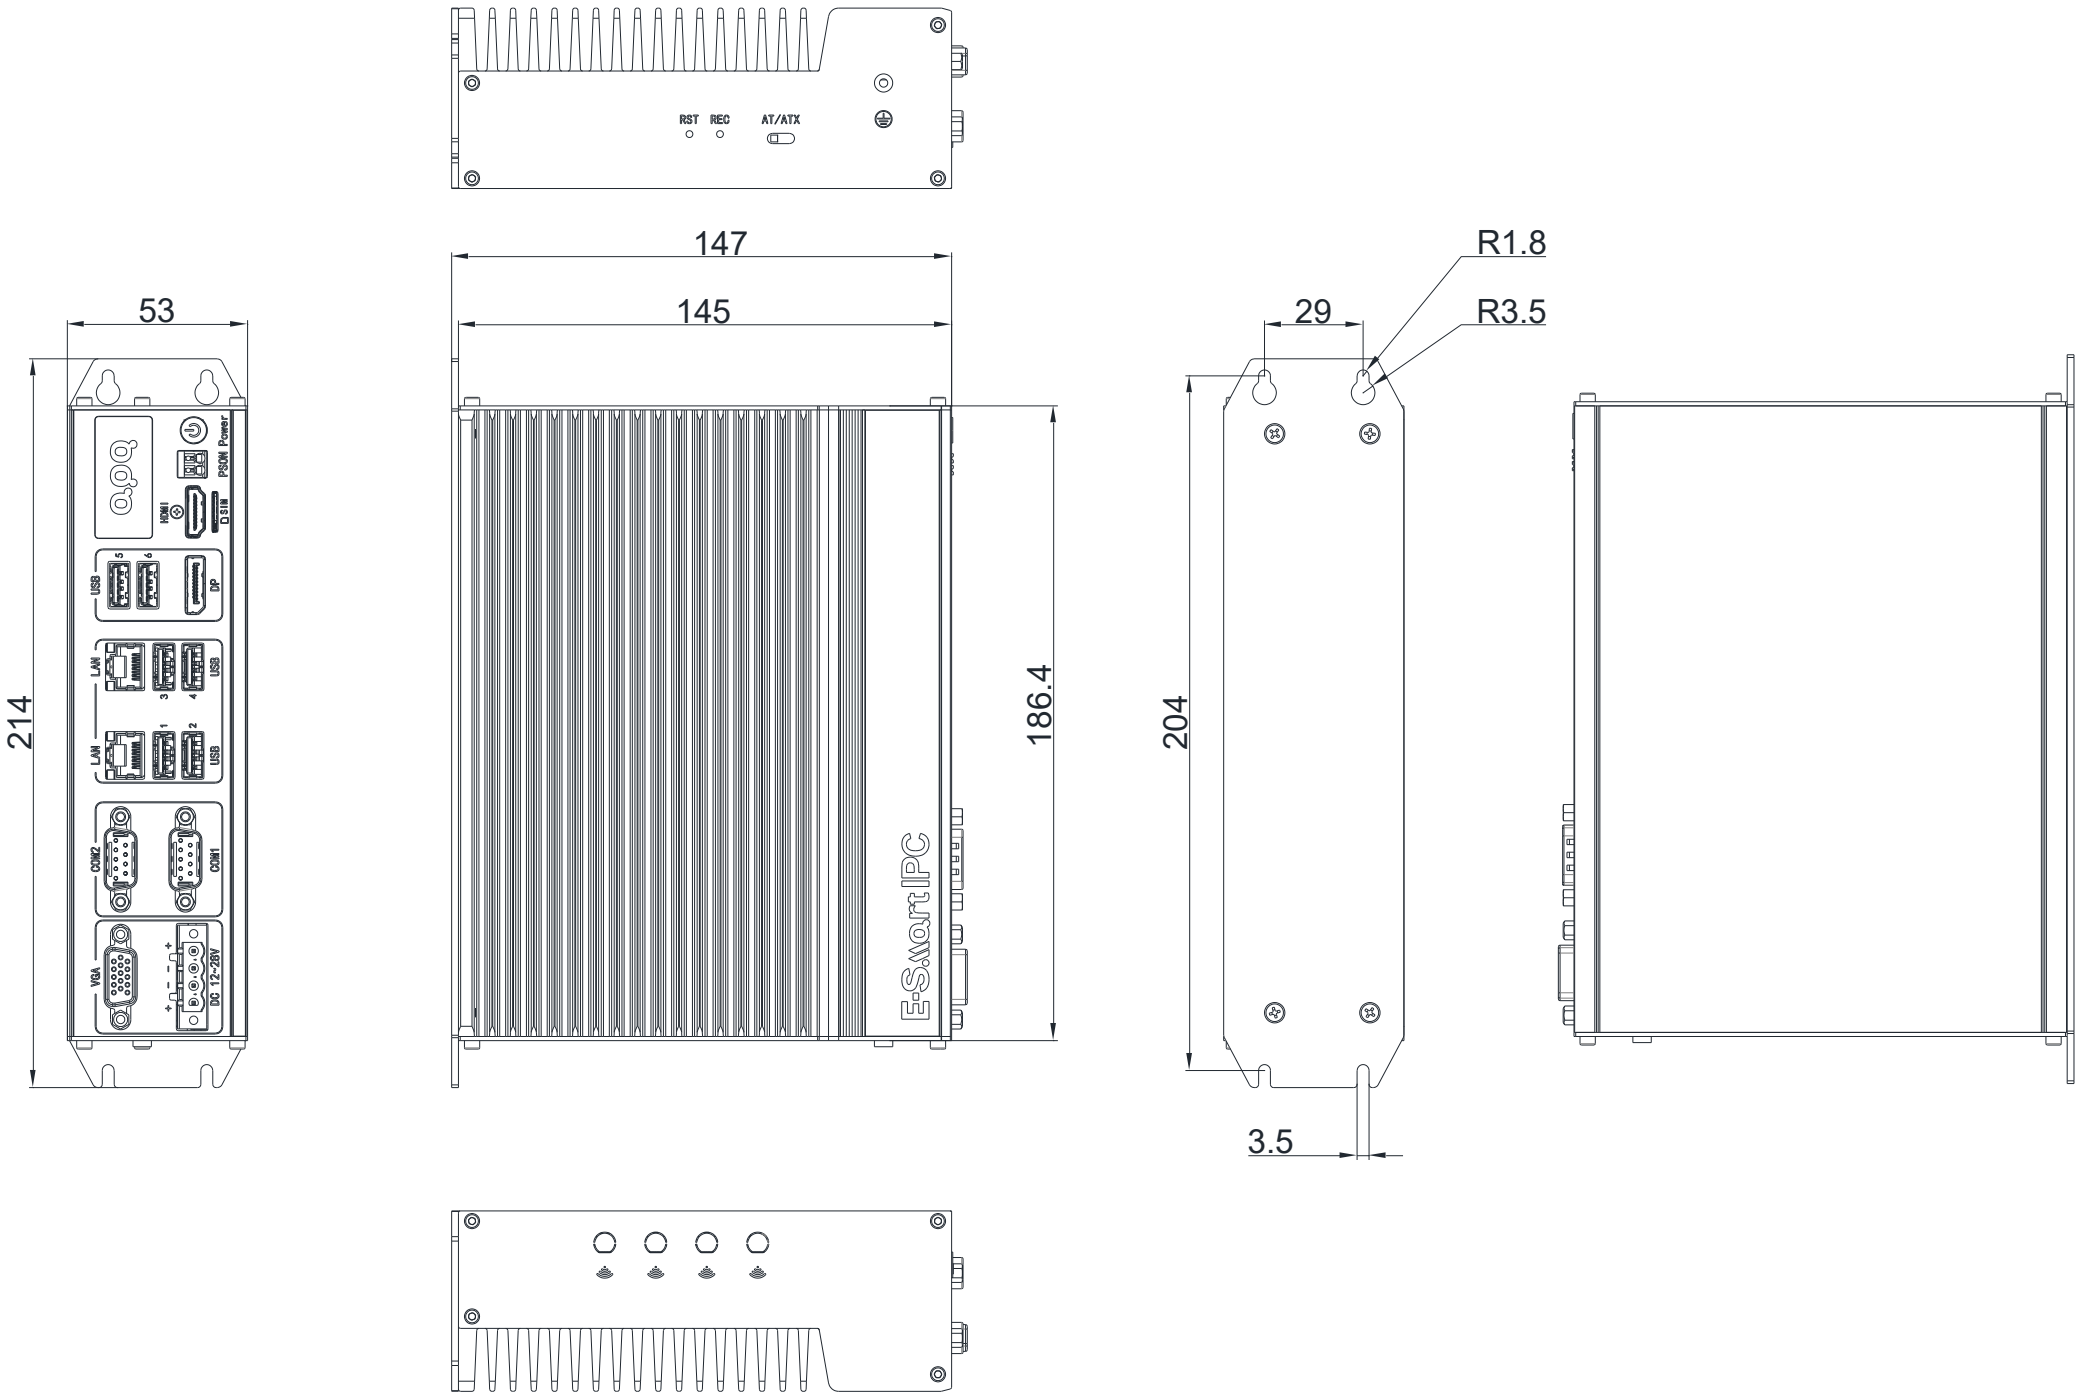

With Primary Cabinet

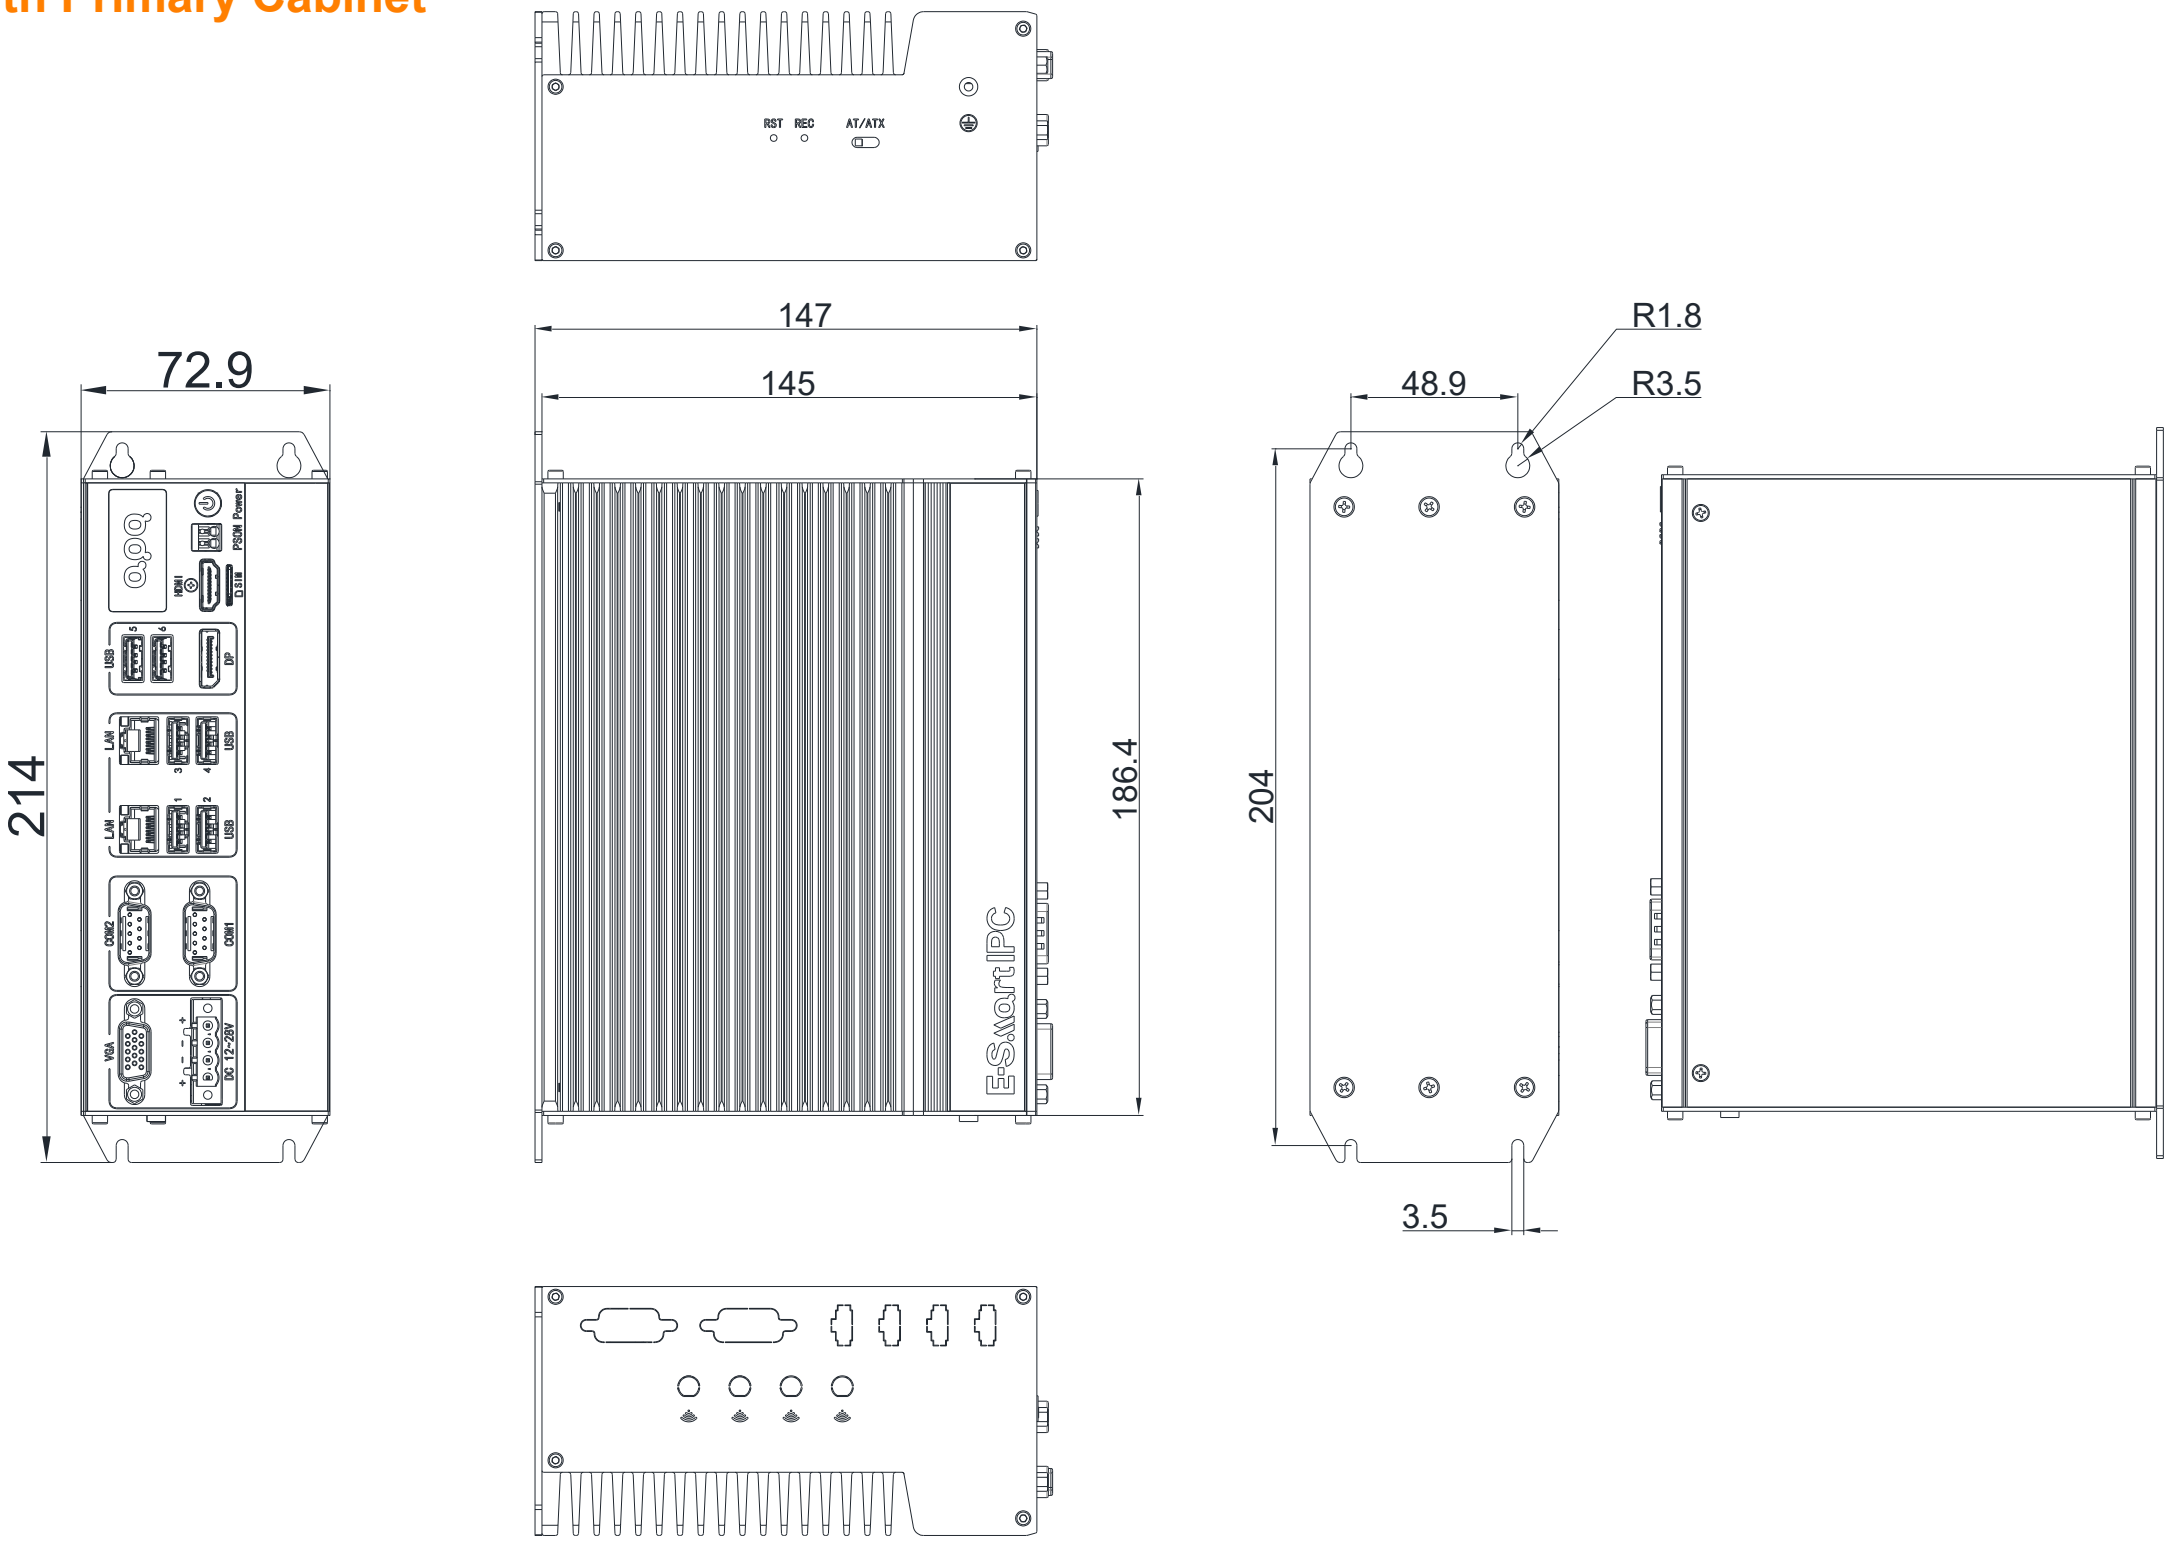

With Primary and Secondary Cabinet

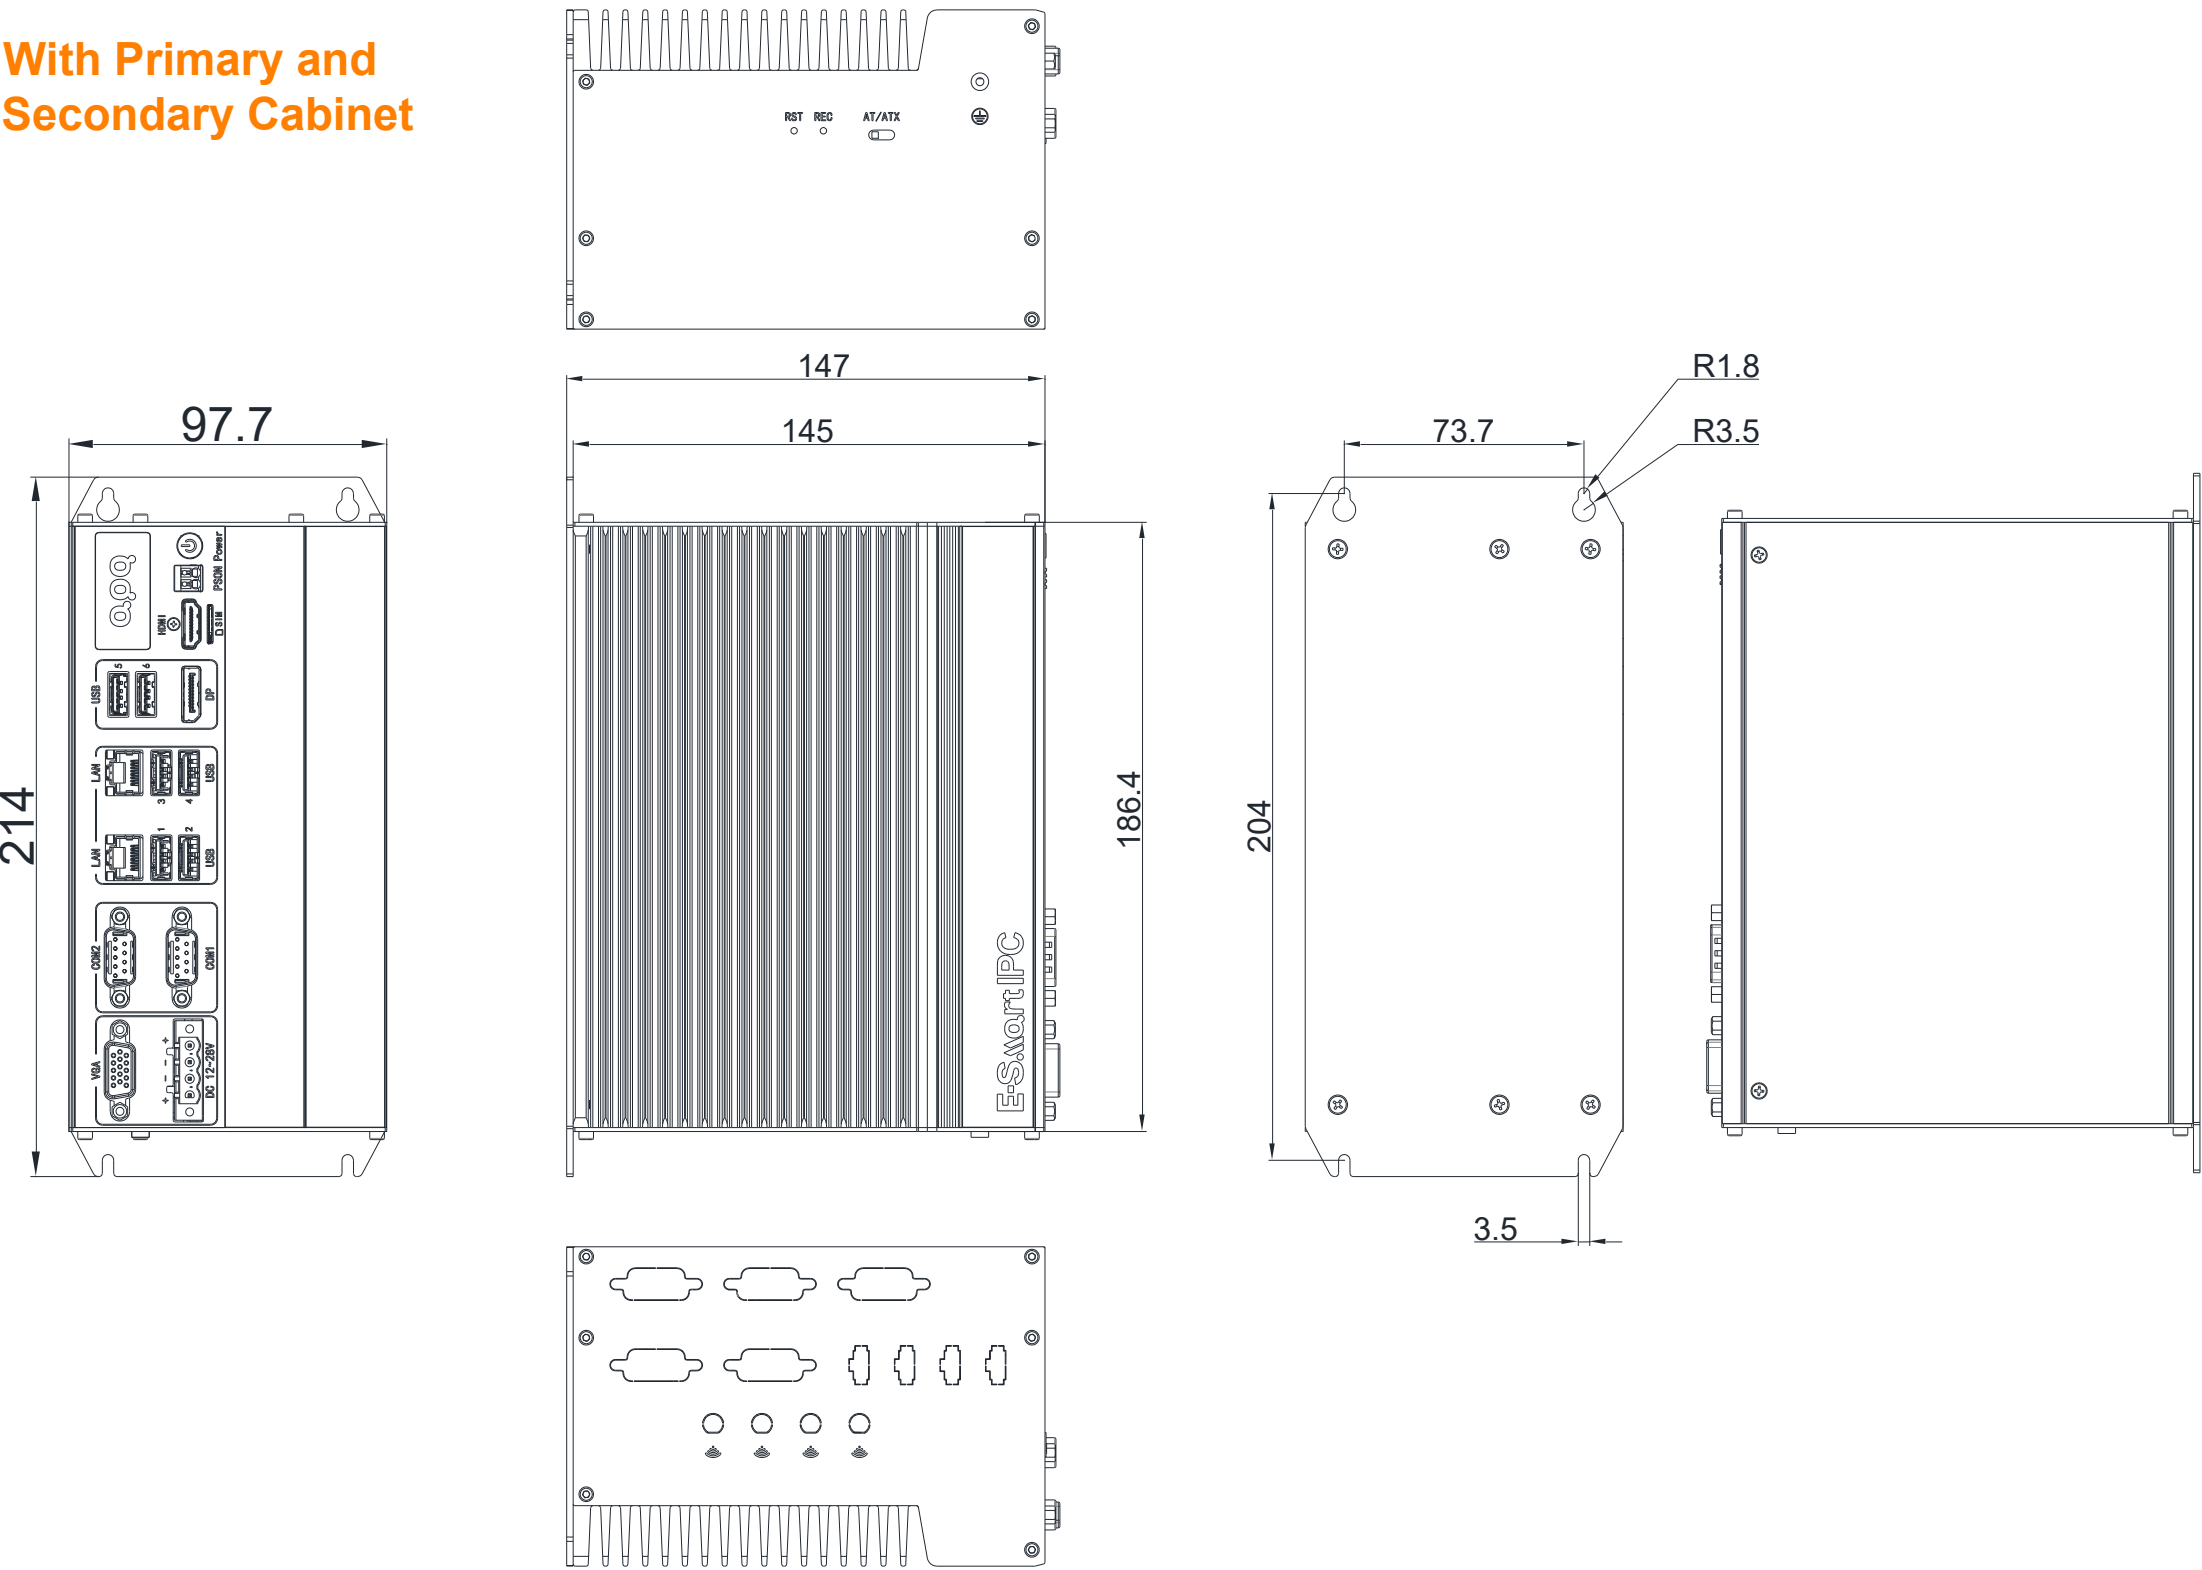

I/O

AK62xxA2

