



Features:

- Capacitive touch screen, USB interface
- Front panel IP65 protection
- Attractive and rugged aluminum alloy enclosure
- Supports DP/HDMI/VGA input
- Industrial-grade screw terminals
- Cantilever mounting
- 12V DC power input

Product Specification

General		Touch	
● I/O Interface	DP, HDMI, VGA, USB	● Touch Type	Projected Capacitive Multi-touch Screen
● Power	12V DC Input	● Control Signal	USB
● Structure	Front frame: Aluminum alloy, Rear cover: SGCC	● Touch Method	Finger / Capacitive Touch Pen
● Mounting	VESA/Flush mount	● Transmittance	≥85%
● Relative Humidity	10 to 90% RH (non-condensing)	● Surface Hardness	6H
● Vibration	1.5Grms@5~500Hz, 0.15MM peak	● Response Time	7~12ms
● Shock	10G, 11ms		

Display Panel

Model	ICD-156CQ	ICD-215CQ
Size	15.6"	21.5"
Resolution	1920*1080	1920*1080
Aspect Ratio	16:9	16:9
Brightness	400 cd/m ²	250 cd/m ²
Contrast Ratio	1000:1	1000:1
Number of Colors	16.7M	16.7M
Backlight Lifetime	20000 hrs	50000 hrs
Operating Temperature	-20~60°C	-20~60°C
Storage Temperature	-20~70°C	-20~70°C
Product Weight	5 Kg	8.4 Kg
Product Dimensions(L*W*H)	392.4*320.6*129.5 mm	528.9*399.4*129.5 mm


Optional Accessories^[1]

Part Name	Part Number	Description
Handle	WS.0FZ.0BLXS0BS-001	Handle for ICD-156CQ, one pair
Handle	WS.0FZ.0BLXS0BS-002	Handle for ICD-215CQ, one pair
Button	KZ.JKB.00BL00AJ-001	4 standard buttons: E-stop (double normally closed) + green momentary (1 NO, 24V LED) + blue momentary (1 NO, 24V LED) + key latching switch (1 NO, 24V LED)
Keyboard & Mouse & Tray Kit	WS.0JP.00BLJPTJ-001	Custom keyboard tray + waterproof keyboard + mouse + mouse pad
Keyboard Tray	WS.0JP.00BL0JPT-001	Simple keyboard tray

Note: [1] The product by default includes the monitor, cantilever mounting kit, 60W adapter kit, and 1.5m 2P 5.08 Phoenix terminal DC power cable. It does **not** include accessories such as handles, buttons, keyboard tray, etc.

Product Size

ICD-XXXCQ

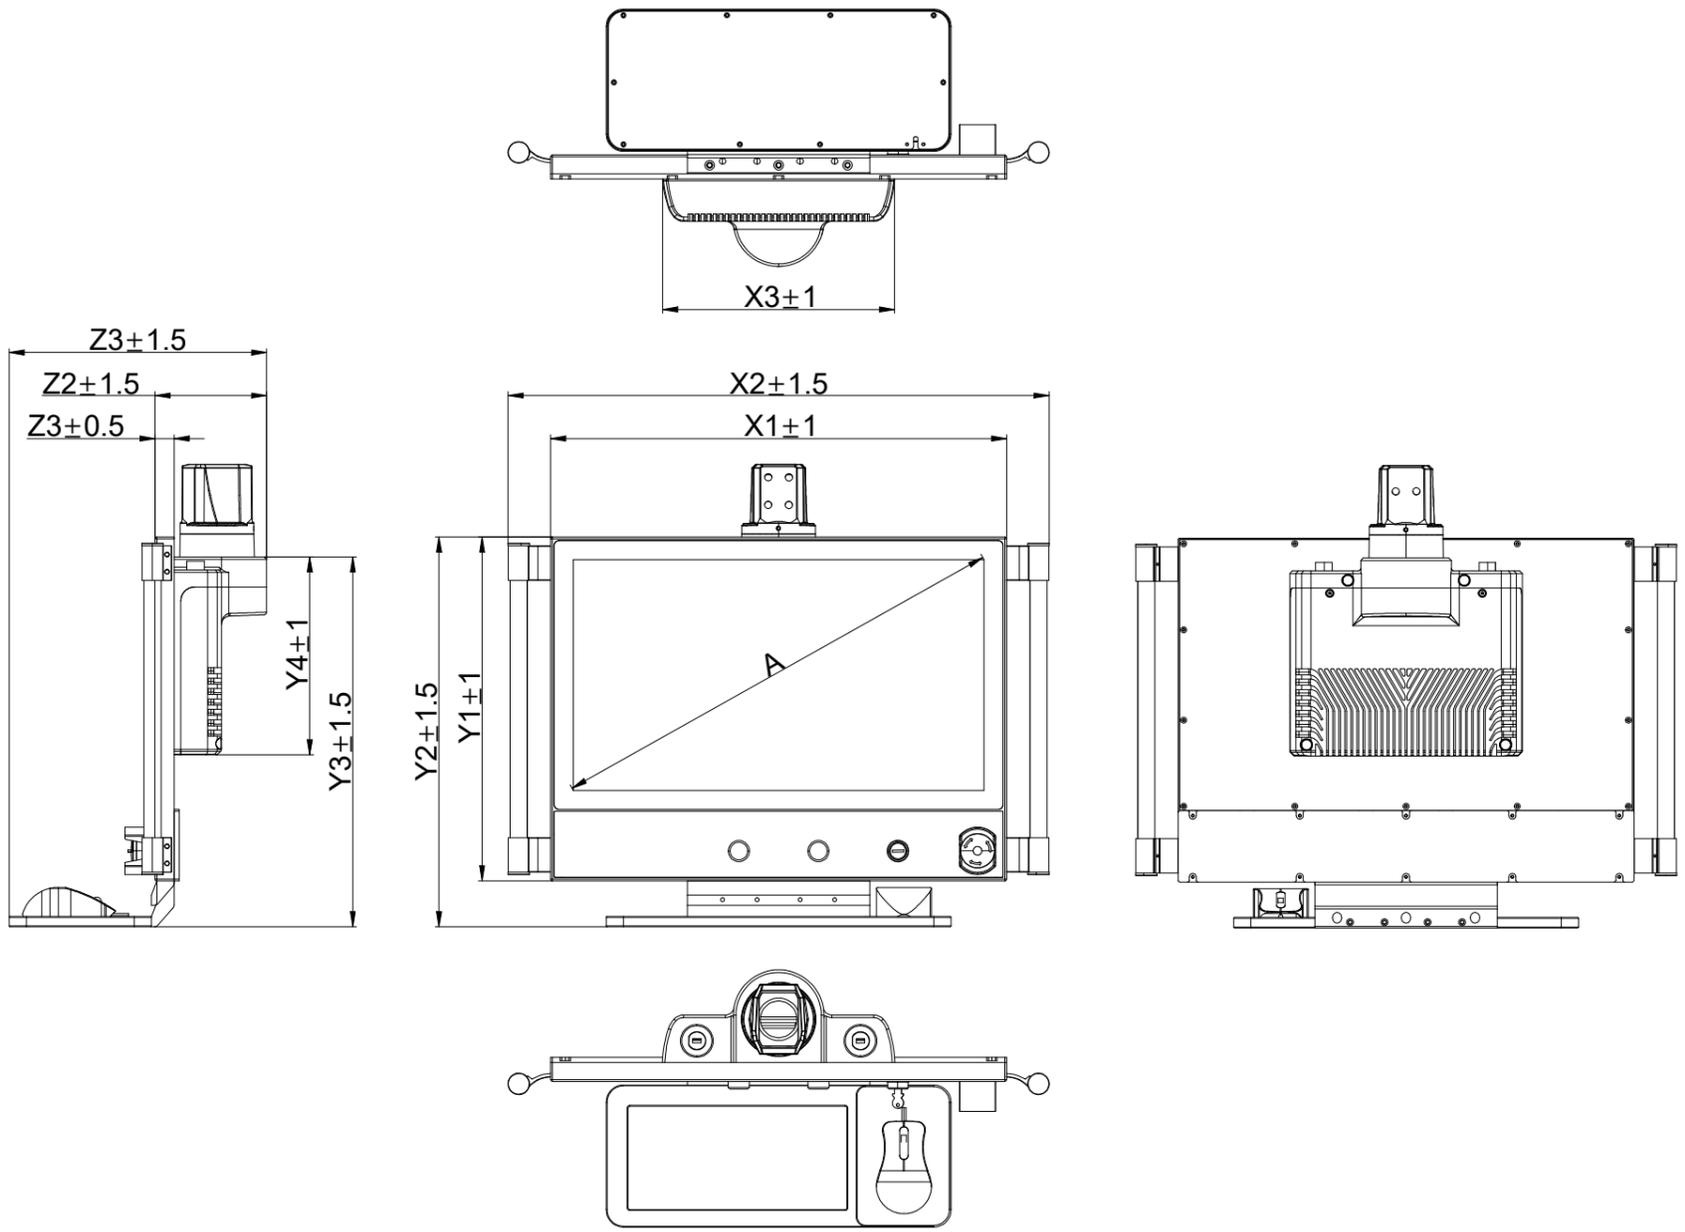

A	X1	Y1	Z1	X2	Y2	Z2	X3	Y3	Z3	Y4
15.6"	392.4	320.6	298.7	491.4	373.9	129.5	269.1	370.9	22	230
21.5"	528.9	399.4	298.7	627.9	452.7	129.5	269.1	429.7	22	230

Product I/O

