

Features:

- Compact short-depth 4U chassis design
- Supports Intel® 6th / 8th / 9th Gen Core™ / Pentium® / Celeron® desktop processors
- Supports standard ATX motherboards and standard 4U power supplies
- Supports up to 7 full-height expansion slots, meeting the needs of multiple industry applications
- User-friendly design with front-mounted system fans for tool-free maintenance
- Carefully designed tool-free PCIe expansion card retention bracket with enhanced shock and vibration resistance
- Equipped with 2 × 3.5-inch anti-vibration, anti-shock hard drive bays as standard
- Front panel design with USB ports and power switch, as well as power and storage status indicators for easier system maintenance



远程管理



状态监控



远程运维



安全控制


Product Specifications

Model	IPC350-Z390SA2	
Processor System	CPU	Supports Intel® 6th / 8th / 9th Gen Core™ / Pentium® / Celeron® desktop processors
	TDP	Six-core 95 W CPUs supported (8-core 65 W / 95 W processors are not supported)
	Socket	LGA1151
	Chipset	Z390
	BIOS	AMI UEFI BIOS
Memory	Socket	2 × U-DIMM slots, dual-channel DDR4-2400 / 2666 MHz support
	Capacity	Maximum 64 GB, up to 32 GB per DIMM
Ethernet	Chipset	<ul style="list-style-type: none"> 1 × Intel® i210-AT Gigabit Ethernet controller 1 × Intel® i219-V/LM Gigabit Ethernet controller
	Ethernet	2 × RJ45 ports
Expansion Slots	SATA	4 × SATA 3.0 ports
	M. 2	1 × mSATA slot (SATA 3.0 signal, mSATA SSD)
	PCIe	<ul style="list-style-type: none"> 1 × PCIe x16 slot (PCIe Gen 3 x16 signal, slot 1) 2 × PCIe x4 slots (PCIe Gen 3 x4 signal, slots 2 and 3)
	PCI	4 × PCI slots (slots 4, 5, 6, and 7)
	Mini PCIe	1 × Mini PCIe slot (PCIe Gen 3 x1 + USB 2.0 signal, with 1 × SIM card slot)
Rear I/O	Ethernet	2 × RJ45 ports
	USB	<ul style="list-style-type: none"> 4 × USB 5Gbps Type-A ports 2 × USB 2.0 Type-A ports
	PS/2	1 × PS/2 combo port (keyboard and mouse)
	Display	<ul style="list-style-type: none"> 1 × DVI-D port: up to 1920 × 1200 @ 60 Hz 1 × HDMI port: up to 4096 × 2160 @ 30 Hz 1 × VGA port: up to 1920 × 1200 @ 60 Hz
	Audio	3 × 3.5 mm audio jacks (Line-out / Line-in / MIC)
	Serial	1 × RS232 DB9 male connector (COM1)
	USB	2 × USB 2.0 Type-A ports
Front I/O	Button	1 × Power button
	LED	<ul style="list-style-type: none"> 1 × Power status LED 1 × HDD status LED
	USB	<ul style="list-style-type: none"> 1 × Vertical USB 2.0 Type-A port 2 × USB 5Gbps pin headers 2 × USB 2.0 pin headers
	Serial	<ul style="list-style-type: none"> 3 × RS232 pin headers (COM2 / COM5 / COM6) 2 × RS232 / RS485 pin headers (COM3 / COM4, selectable via jumper)
	Audio	1 × Front audio pin header (Line-out + MIC)
Internal I/O	GPIO	1 × 8-channel digital I/O pin header (default 4 DI + 4 DO; logic-level only, no load-driving capability)
	SATA	4 × SATA 3.0 ports
	Fan	<ul style="list-style-type: none"> 2 × system fan headers 1 × CPU fan header
	Type	ATX
	Power Input Voltage	Voltage range depends on selected power supply
Power Supply	RTC Battery	CR2032 coin-cell battery
	Windows	6 Gen CPU: Win 7/10/11 8/9 Gen CPU: Win 10/11
	Linux	Linux
Trusted Platform	TPM	Default fTPM, optional dTPM 2.0
Watchdog	Output	System Reset
	Interval	1 ~ 255 seconds
Mechanical	Enclosure Material	Galvanized steel
	Dimensions	330mm (W) * 351mm (D) * 180mm (H)
	Mounting	Rackmount
Environment	Heat Dissipation System	Smart fan cooling
	Operating Temperature	0 ~ 50°C

	Storage Temperature	-20 ~ 70°C
	Relative Humidity	10 ~ 90%, non-condensing


Product Dimension

IPC350立式

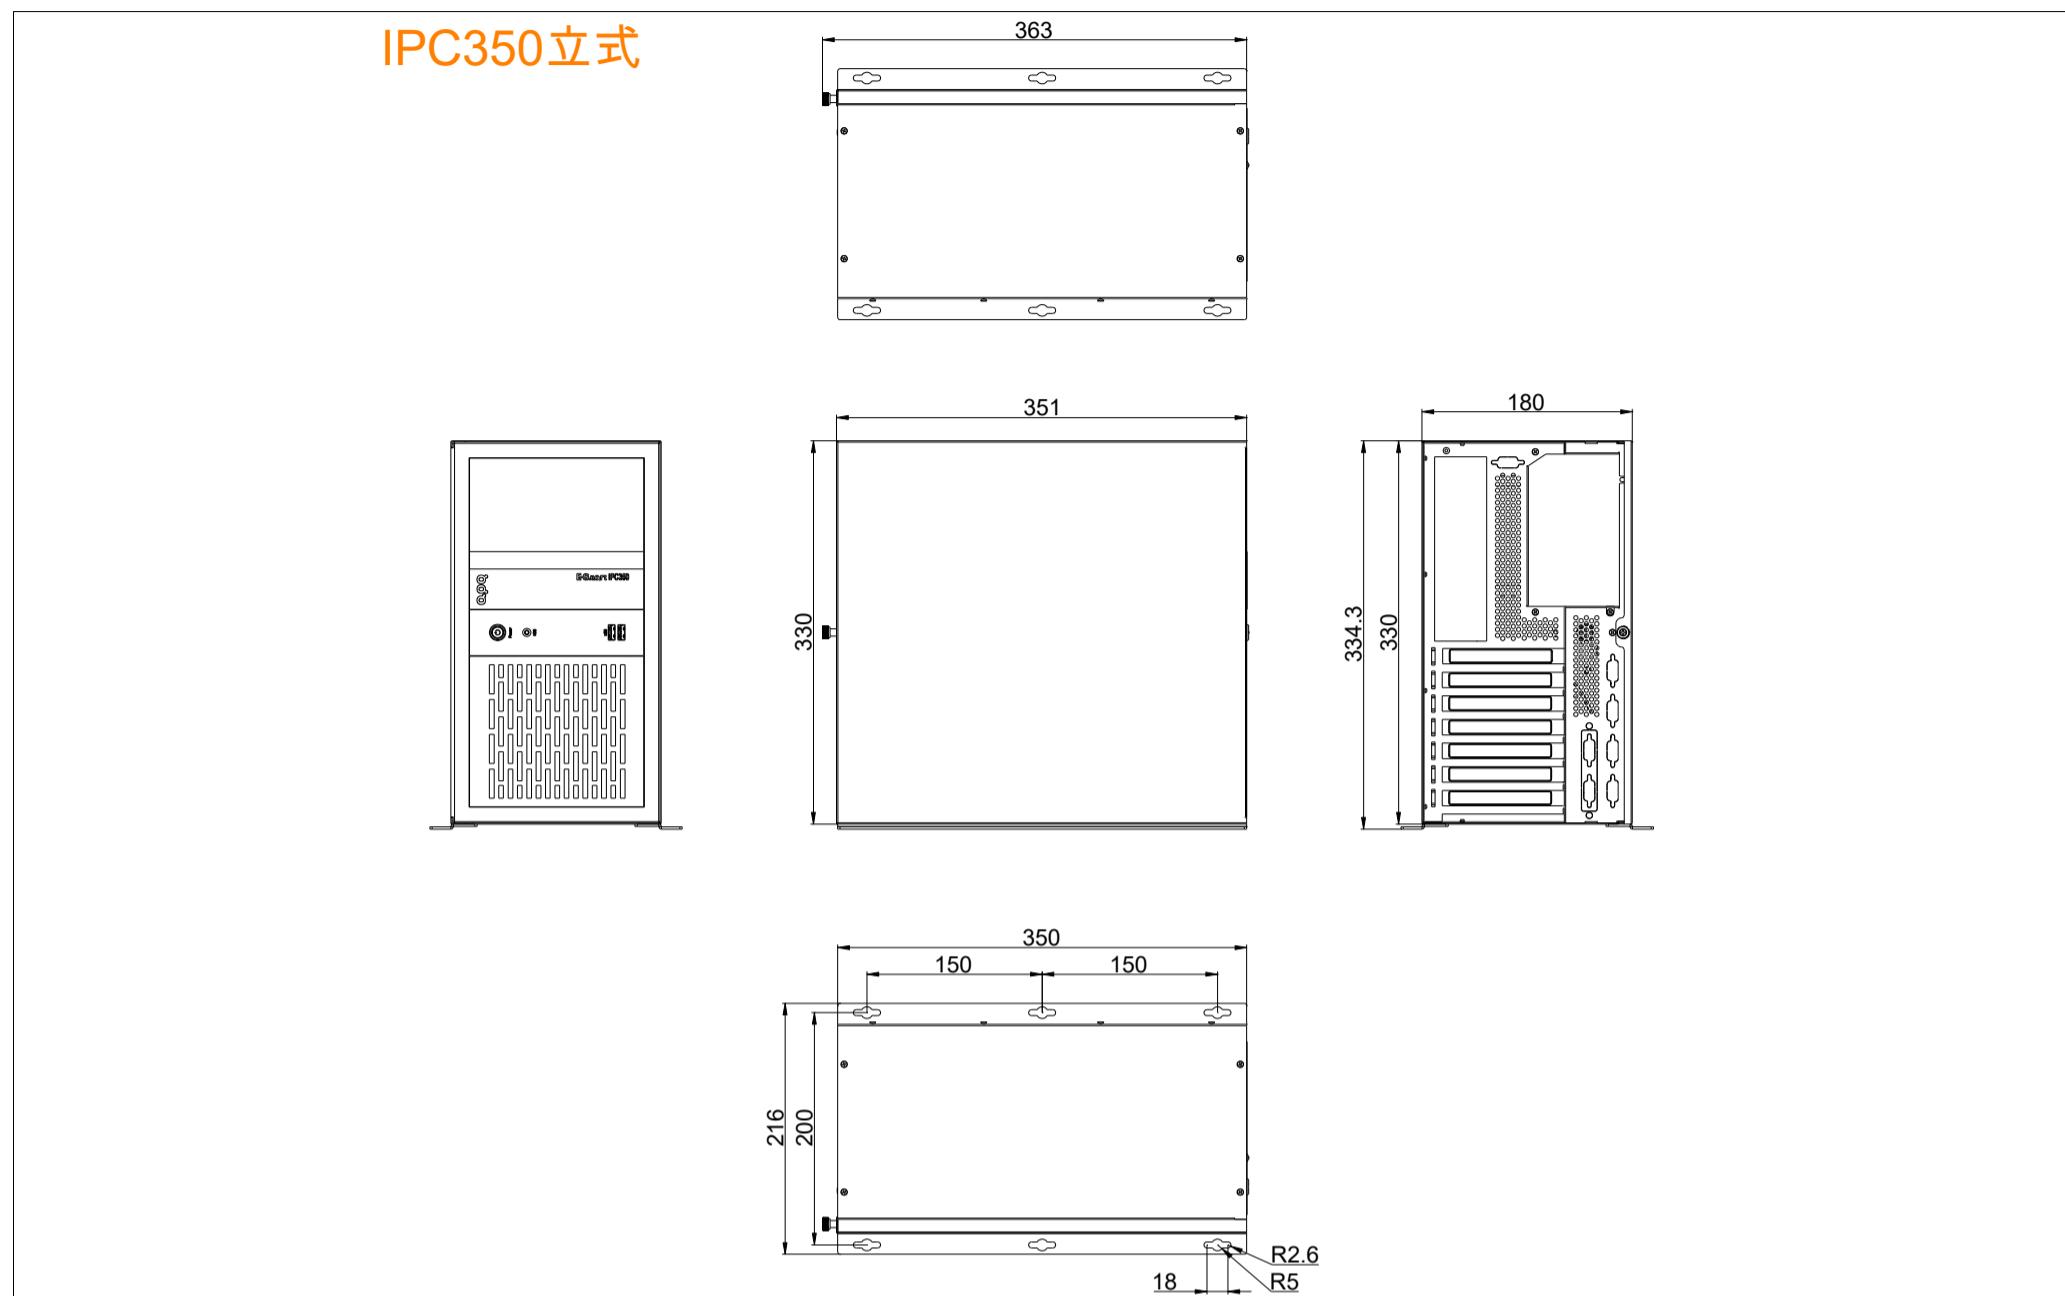

Chassis I/O

IPC350立式

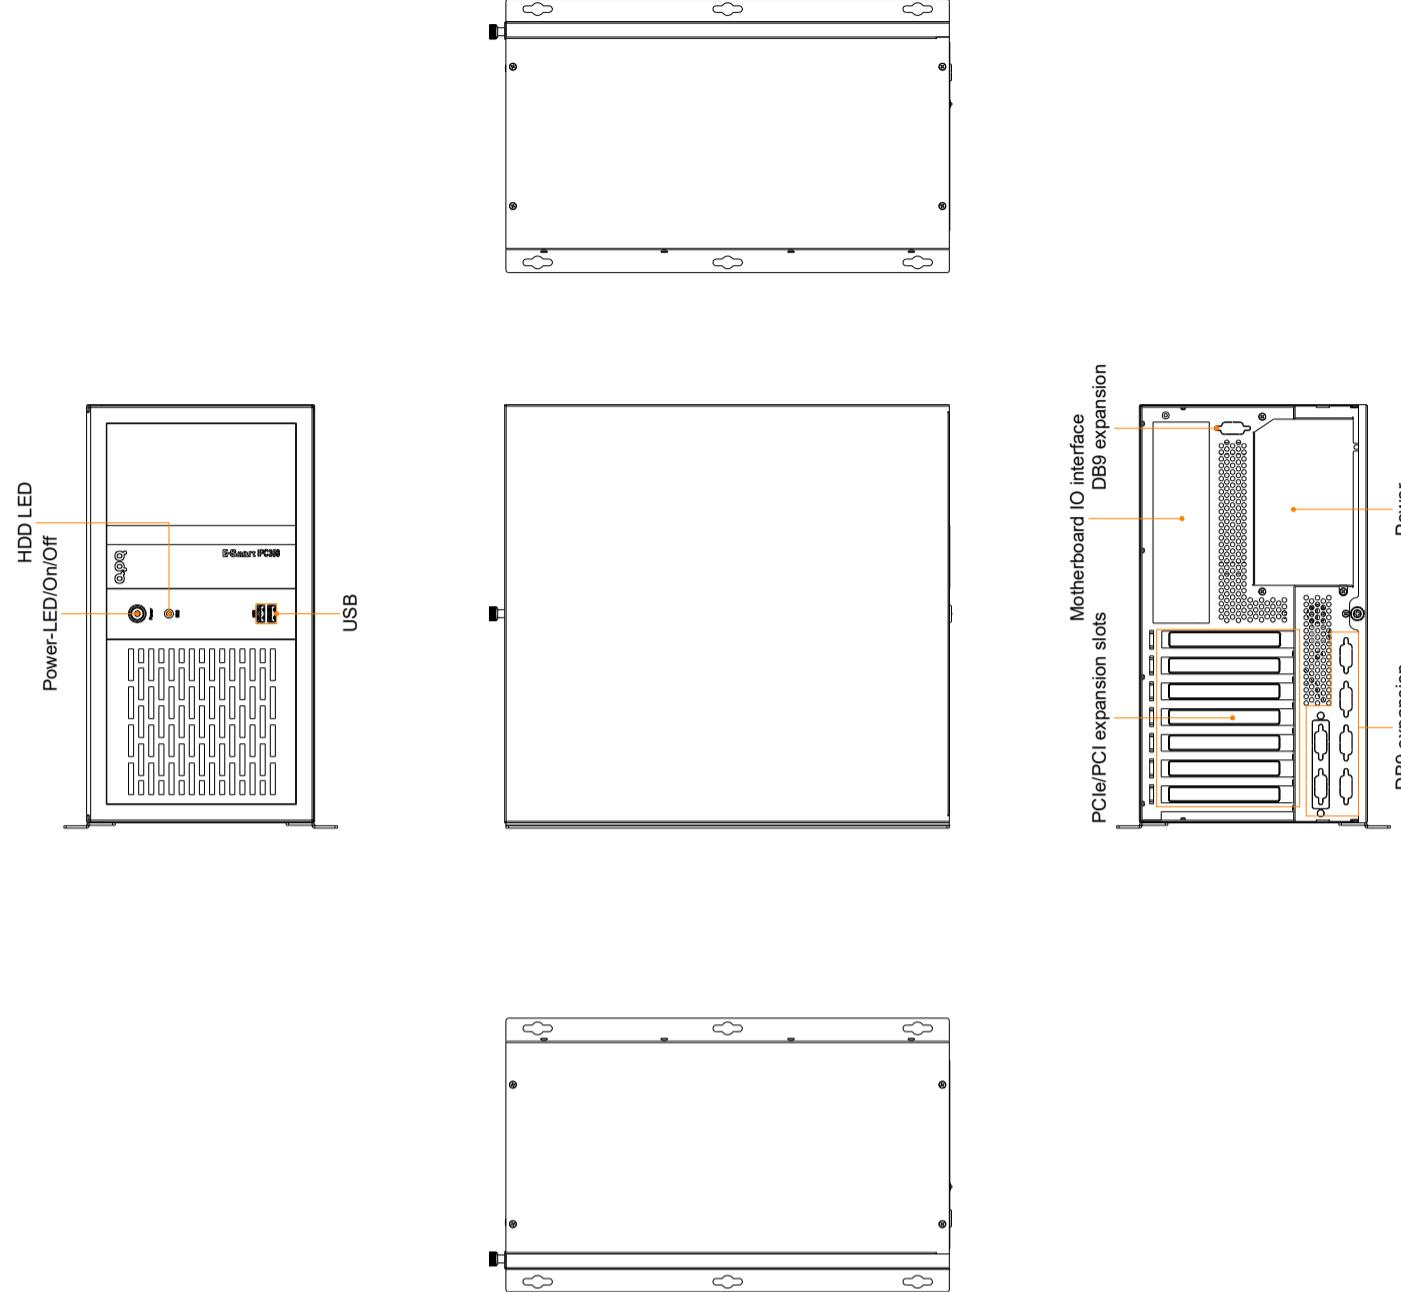

Motherboard I/O

