



## Features:

- Full-screen design
- Ultra-slim profile
- Full lamination
- Full lamination technology
- Front panel IP65 protection
- Supports DP/HDMI/VGA input
- Multiple sizes available:10.1"~21.5"
- VESA / flush mount compatible
- 12V DC power input


## Product Specification

General		Touch	
● I/O Interface	DP, HDMI, VGA, USB	● Touch Type	Projected Capacitive Multi-touch Screen
● Power	2-pin 3.8mm (12V)	● Control Signal	USB
● Structure	Front frame: Aluminum alloy, Rear cover: SGCC	● Touch Method	Finger / Capacitive Touch Pen
● Mounting	VESA/Flush mount	● Transmittance	≥85%
● Relative Humidity	10 to 90% RH (non-condensing)	● Surface Hardness	7H
● Vibration	1.5Grms@5~500Hz, 0.15MM peak		
● Shock	10G, 11ms		

## Display Panel

Model	ITD-101CQ	ITD-156CQ	ITD-185CQ	ITD-215CQ
Size	10.1"	15.6"	18.5"	21.5"
Resolution	1280 x 800	1920*1080	1920*1080	1920*1080
Aspect Ratio	16:10	16:9	16:9	16:9
Brightness	500 cd/m <sup>2</sup>	400 cd/m <sup>2</sup>	300 cd/m <sup>2</sup>	250 cd/m <sup>2</sup>
Contrast Ratio	1300:1	1000:1	800:1	1300:1
Number of Colors	16.7M	16.7M	16.7M	16.7M
Backlight Lifetime	30000 hrs	20000 hrs	20000 hrs	30000 hrs
Operating Temperature	-20~60°C	-20~60°C	-20~60°C	-20~60°C
Storage Temperature	-20~70°C	-20~70°C	-20~70°C	-20~70°C
Product Weight	1.04 kg	2 kg	2.96 kg	6.5 kg
Product Dimensions(L*W*H)	262.3*180.9*18 mm	388.4*237.6*18 mm	454.3*296.8*18 mm	526.6*317.7*18 mm

### Product Size

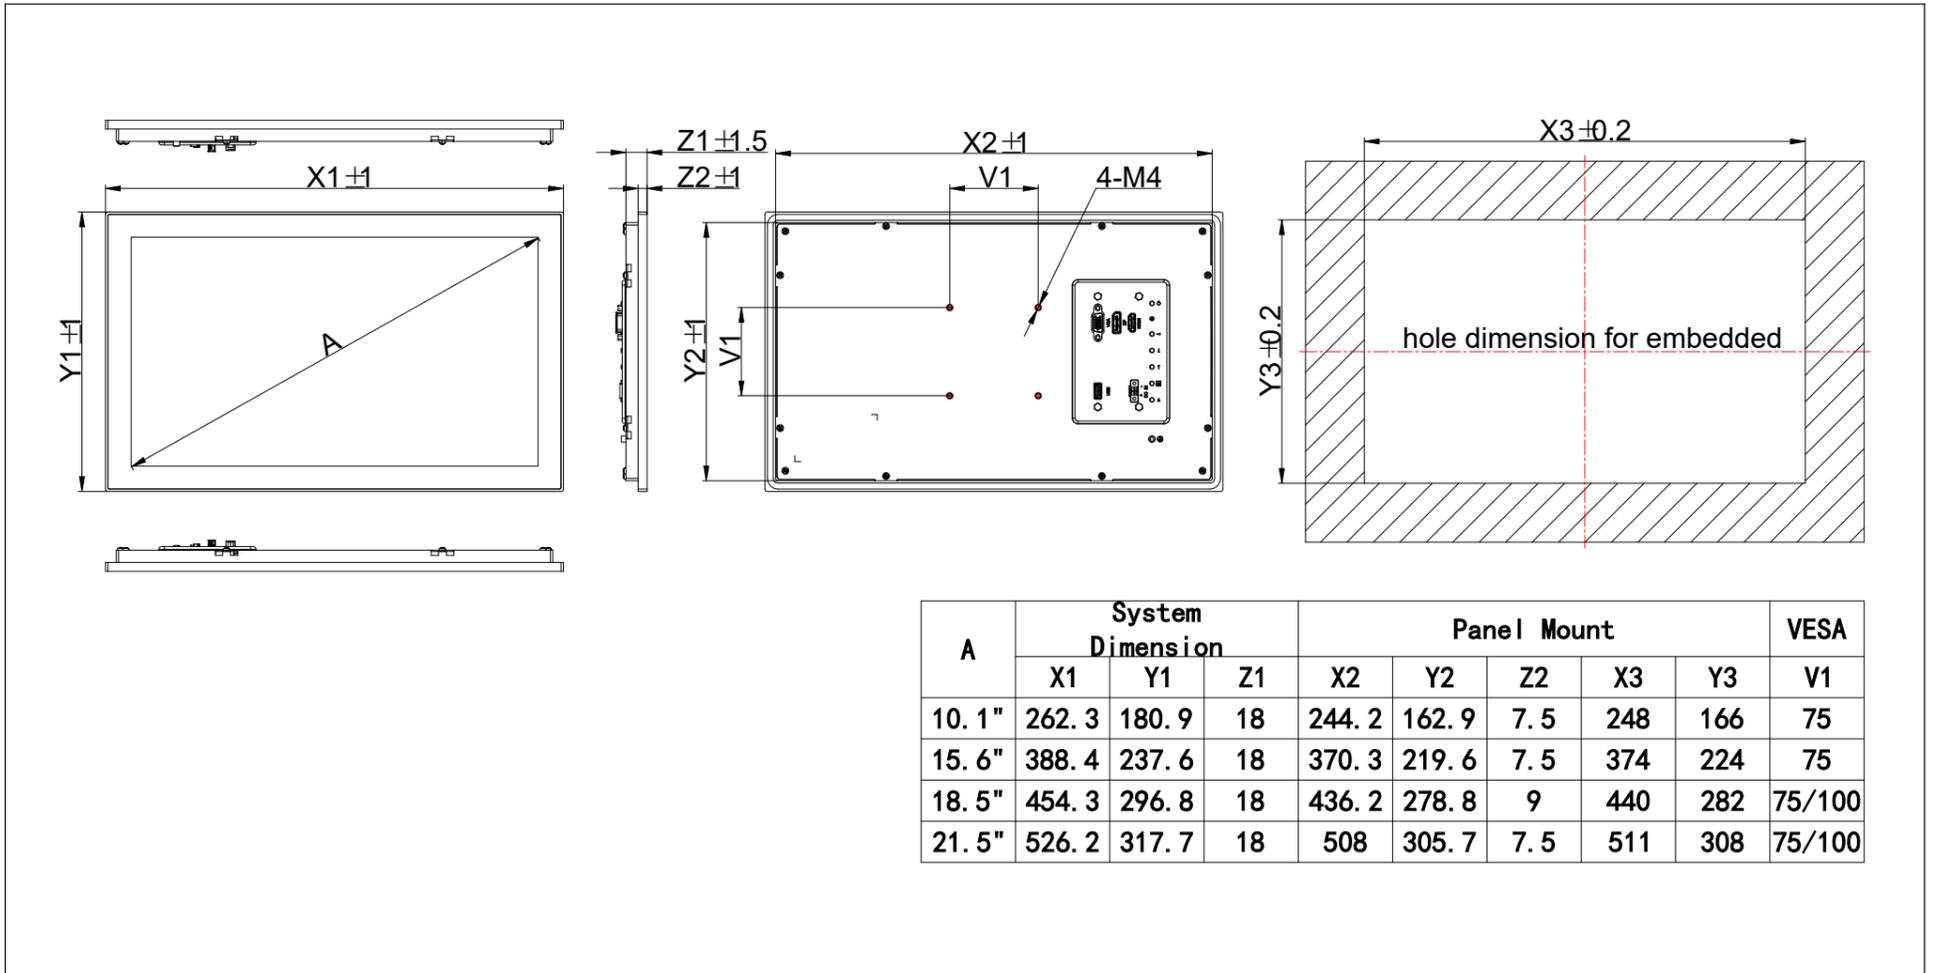

### Product I/O

