

Features:

- Aluminum alloy molded chassis
- Intel® 4thCore/Pentium/Celeron Desktop CPU
- Fits standard ITX motherboards, supports standard 1U Battery Power
- Optional riser card for 1*PCIe X16 and 1* PCIe X4+1* PCI expansion
- Standard 2*2.5" 15mm shock & impact-resistant drive bay
- Front power switch and status LEDs
- Supports multi-orientation wall-mount and desktop installation



Remote Management



Condition Monitoring



Remote Operation And Maintenance




Safety Control


Product Specification

Model	IPC330Q-H81SA4	
Processor System	CPU	Intel® 4 th Core/Pentium/Celeron Desktop CPU
	TDP	85W
	Socket	LGA1150
	Chipset	H81
	BIOS	AMI UEFI BIOS
Memory	Socket	2 * U-DIMM Slot, Dual Channel DDR3-1600 MHz
	Capacity	16GB, Single Max 8GB
Ethernet	Controller	4 * Intel i210-AT Chip
Storage	SATA	1 * SATA 3.0 1 * SATA 2.0
	mSATA	1 * mSATA Slot (SATA 3.0 Signal, mSATA SSD)
Expansion Slots	PCIe	1 * PCIe x16 Slot (PCIe Gen 3 x16 signal) 1 * PCIe x4 Slot (PCIe Gen 2 x1 signal)
	PCI	1 * PCI Slot (optional)
Front I/O	Ethernet	4 * RJ45
	USB	2 * USB 5Gbps Type-A 4 * USB 2.0 Type-A
	Display	1 * HDMI: max resolution up to 3840*2160 @ 24Hz 1 * VGA: max resolution up to 1920*1200 @ 60Hz
	Audio	3 * 3.5mm Jack (Line-out + Line-in + MIC)
	Button	1 * Power Button
	LED	1 * Power status LED 1 * Hard drive status LED
Internal I/O	COM	2 * RS232/RS485/RS422 2 * RS232 (COM3/4)
	Audio	1 * Front Audio (Line-Out + MIC)
	USB	2 * USB 2.0
	GPIO	1 × 8-channel digital input/output header (default: 4 inputs, 4 outputs)
	SATA	2 * SATA Connector
	FAN	1 * SYS FAN (Header) 1 * CPU FAN (Header)
Power Supply	Type	1U
	Power Input Voltage	AC power supply, voltage and frequency shall be based on the ATX power supply provided
	RTC Battery	CR2032 Coin Cell
OS Support	Windows	Win 7/10/11
	Linux	Linux
Platform	TPM	fTPM
Watchdog	Output	System Reset
	Interval	Programmable 1 ~ 255 sec
Mechanical	Enclosure Material	SGCC
	Dimensions	266mm(L) * 268mm(W) * 169mm(H)
	Mounting	Shelf mounted installation Desktop
Environment	Heat Dissipation System	PWM fan cooling
	Operating Temperature	0 ~ 50°C
	Storage Temperature	-20 ~ 70°C
	Relative Humidity	10 ~ 90%(non-condensing)

Product Size

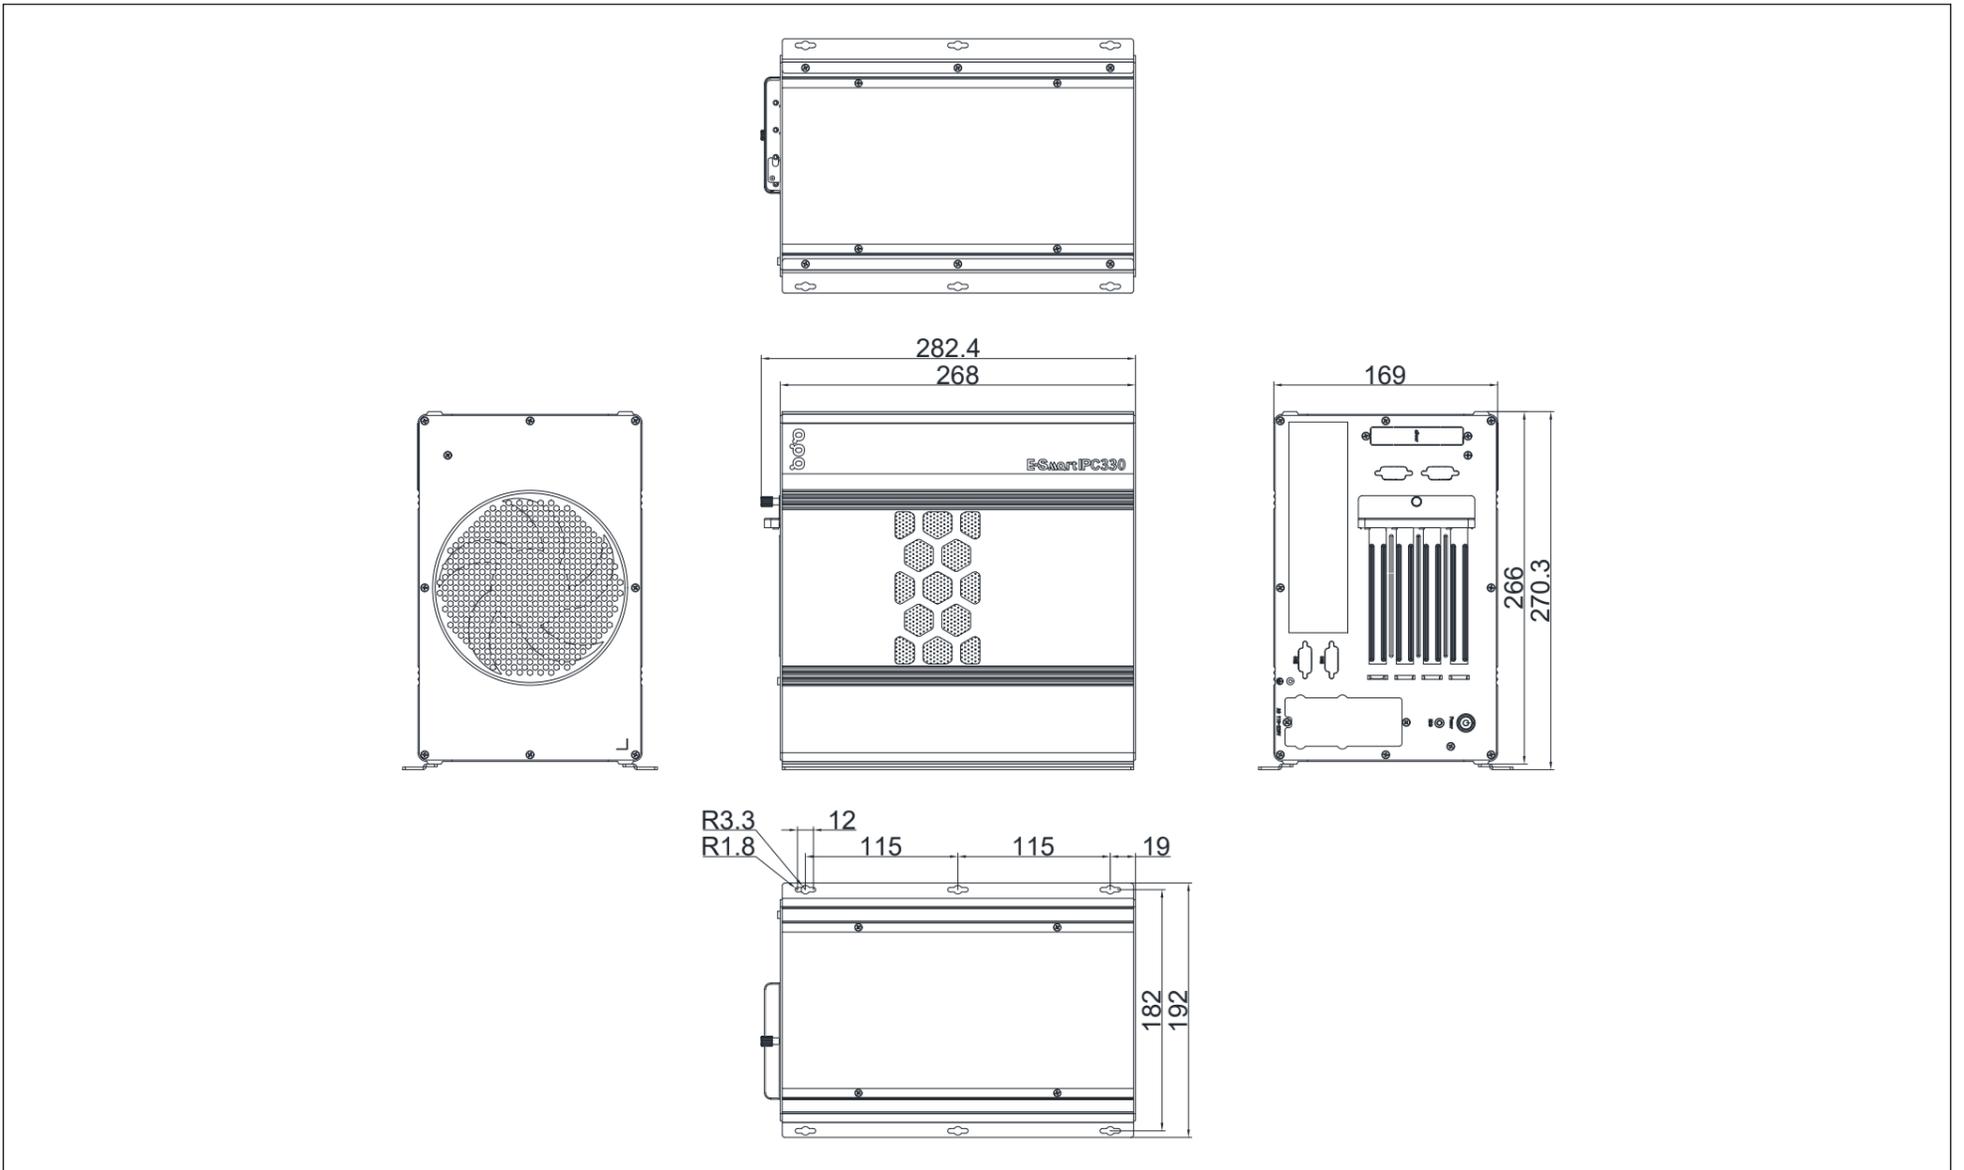

Chassis Interfaces

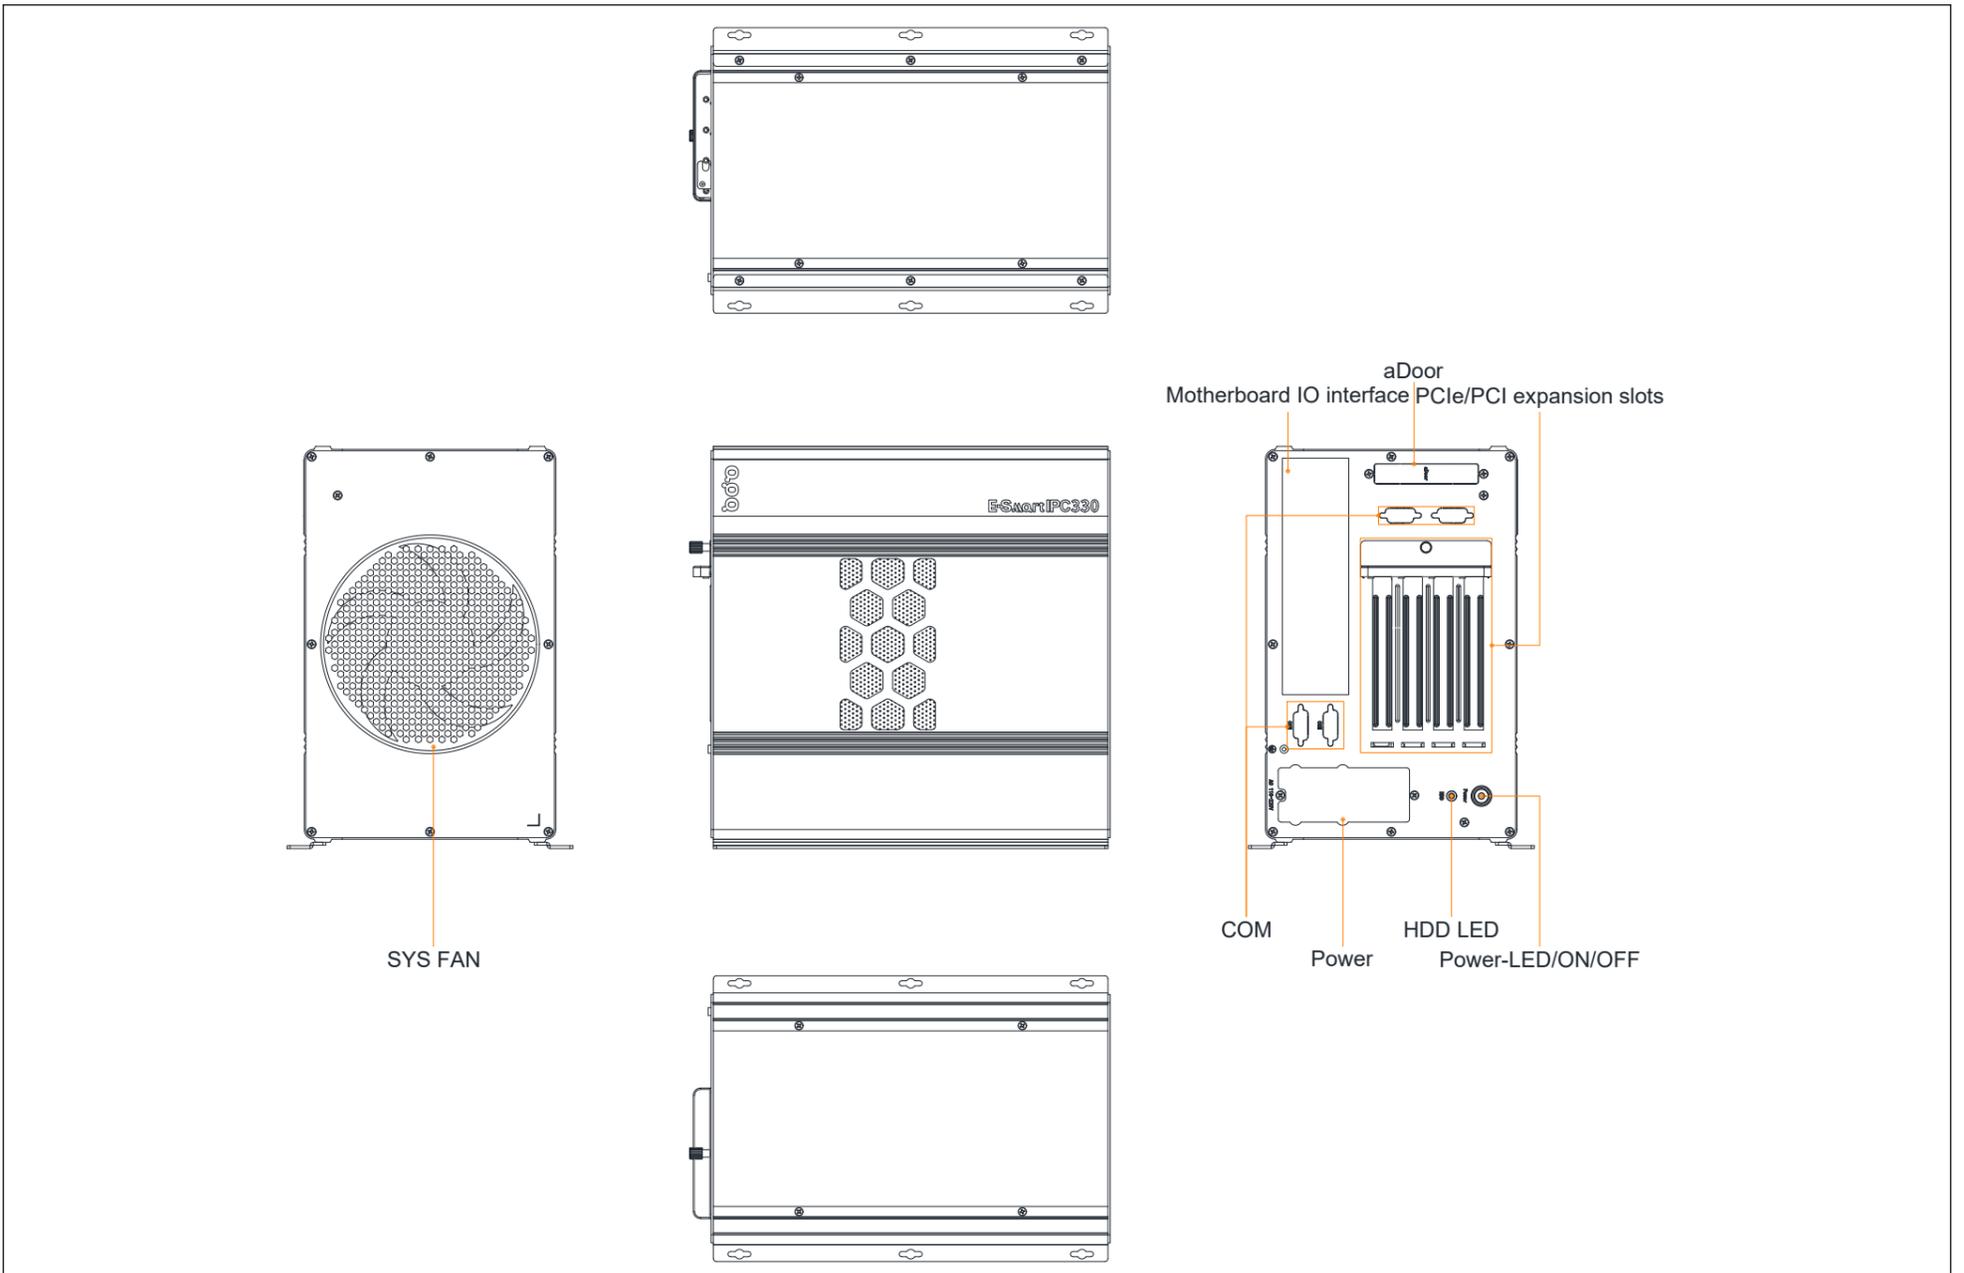

Motherboard Interface

